

SPCK PRE-SET, REPLACEABLE HEAD TORQUE WRENCHES


Work at a set torque value can proceed smoothly while using various replaceable heads.

FEATURES

- Replaceable ratchet, open end wrench, ring, and hex drive heads are available.
- Pre-set torque wrench well suited for repetitive jobs at the specified torque value.
- Accuracy : $\pm 3\%$ of pre-set value

USING AN SPCK

Mount the head on the drive.

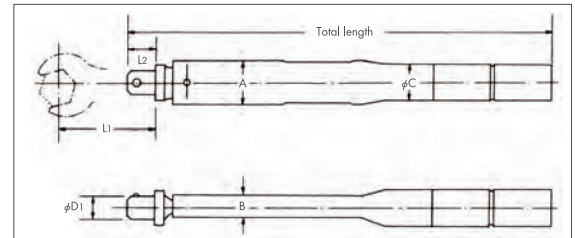

Model (kgf·cm)	Range kgf·cm	Old Model (N·m)	New Model (N·m)	Range N·m	Total length mm	Dimensions (mm)						Weight kg	Replaceable heads
						Head			Body				
						phi D1	L1	L2	A	B	phi C		
60SPCK	20~60	N60SPCK	N6SPCK	2~6	161	10	45	13	18.2	9.6	15	0.15	12QCK,
120SPCK	40~120	N120SPCK	N12SPCK	4~12									25 (QCK, SCK, RCK, HCK)
250SPCK	50~250	N250SPCK	N25SPCK	5~25	196	12	55	16	25	11.4	20	0.27	50 (QCK, SCK, RCK, HCK)
500SPCK	100~500	N500SPCK	N50SPCK	10~50	220								15
1000SPCK	200~1,000	N1000SPCK	N100SPCK	20~100	312	18	80	22	34	15.4	27.2	0.92	200 (QCK, SCK, RCK, HCK, NCK)
2000SPCK	400~2,000	N2000SPCK	N280SPCK	40~200	428								22
2800SPCK	600~2,800	N2800SPCK	N440SPCK	60~280	590	22	100	27	38	16	30	2.6	440 (QCK, SCK, RCK)
4400SPCK	600~4,400	N4400SPCK		60~440	893								39

SPCKH PRE-SET, REPLACEABLE HEAD TORQUE WRENCHES WITH RUBBER GRIP

Work at a set torque value can proceed smoothly while using various replaceable heads.



Optional Replaceable Heads (Refer to the page 10)



■ H-type : The end cap is removed with a slotted screwdriver to adjust torque.

Model (kgf·cm)	Range kgf·cm	Old Model (N·m)	New Model (N·m)	Range N·m	Total length mm	Dimensions (mm)						Weight kg	Replaceable heads
						Head			Body				
						phi D1	L1	L2	A	B	phi C		
60SPCKH	20~60	N60SPCKH	N6SPCKH	2~6	161	10	45	13	18.2	9.6	26.5	0.17	12QCK,
120SPCKH	40~120	N120SPCKH	N12SPCKH	4~12									25 (QCK, SCK, RCK, HCK)
250SPCKH	50~250	N250SPCKH	N25SPCKH	5~25	196	12	55	16	25	11.4	32.7	0.3	50 (QCK, SCK, RCK, HCK)
500SPCKH	100~500	N500SPCKH	N100SPCKH	10~50	220								15
1000SPCKH	200~1,000	N1000SPCKH		20~100	312								

■ A-type : Adjusted setting torque value by hex wrench.

Model (kgf·cm)	Range kgf·cm	Model (N·m)	Range N·m	Total length mm	Dimensions (mm)						Weight kg	Replaceable heads	
					Head			Body					
						phi D1	L1	L2	A	B	phi C		
60SPCK-A	20~60	N6SPCK-A	2~6	161	10	45	13	18.2	9.6	26.5	0.17	12QCK,	
120SPCK-A	40~120	N12SPCK-A	4~12									25 (QCK, SCK, RCK, HCK)	
250SPCK-A	50~250	N25SPCK-A	5~25	196	12	55	16	25	11.4	32.7	0.3	50 (QCK, SCK, RCK, HCK)	
500SPCK-A	100~500	N50SPCK-A	10~50	220								15	65
1000SPCK-A	200~1,000	N100SPCK-A	20~100	312									

* is the new model that is applied from 1st January, 2016.